


Izaberi “Spoljna jedinica”

Otvoriti Početni ekran za registraciju spoljne jedinice


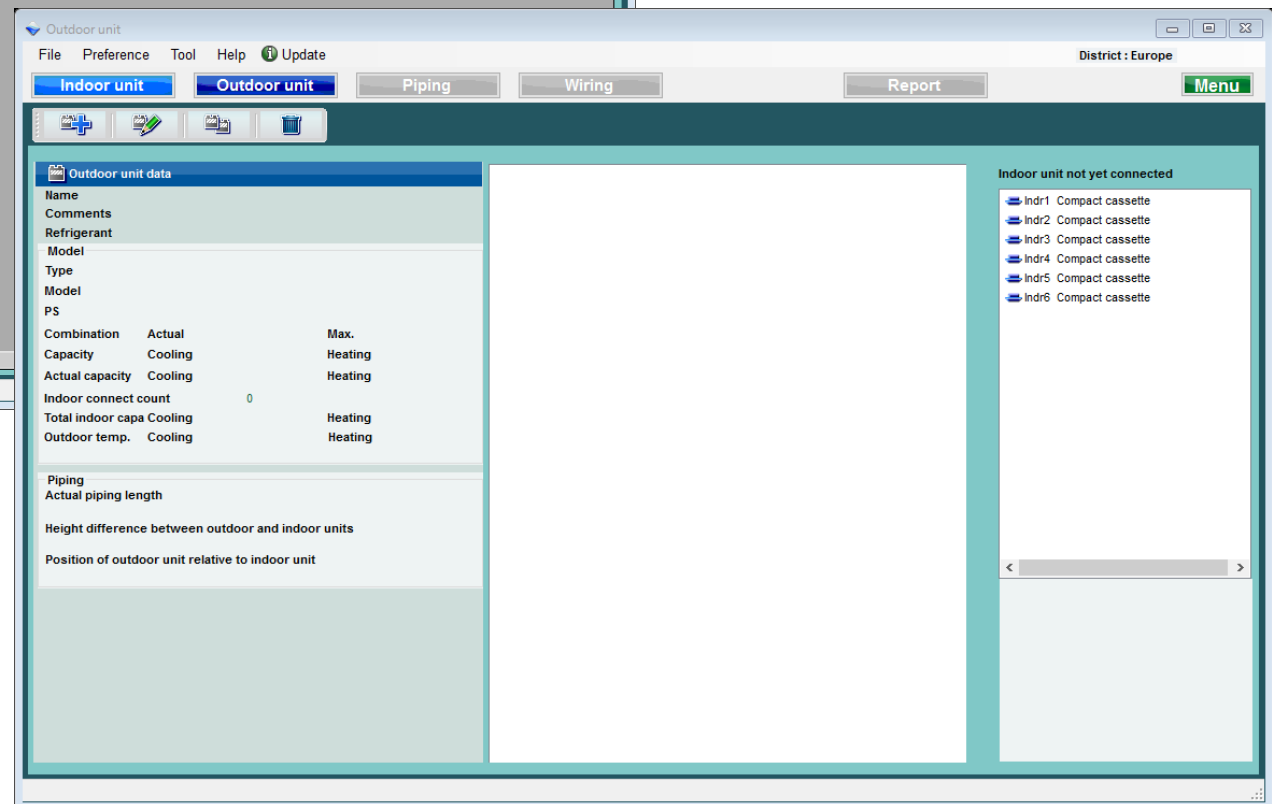


Spoljna jedinica (1/4)

Odabrati “Dodati novu spolnju jedinicu”



Uneti novu spolnju jedinicu

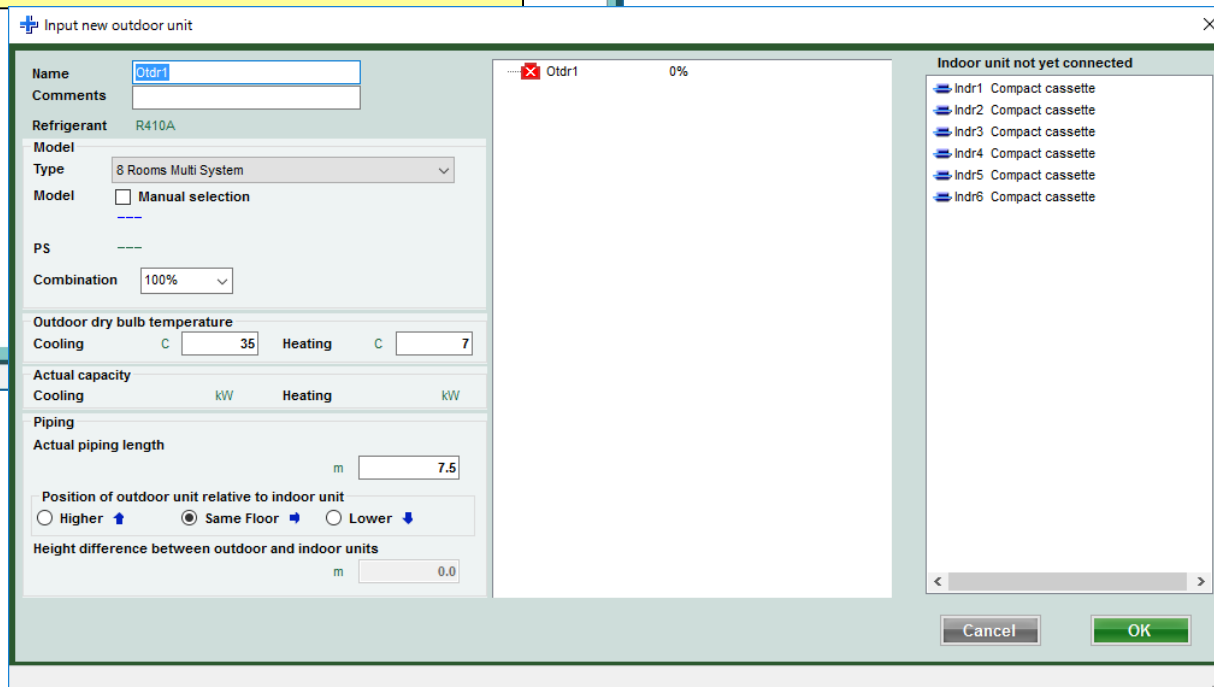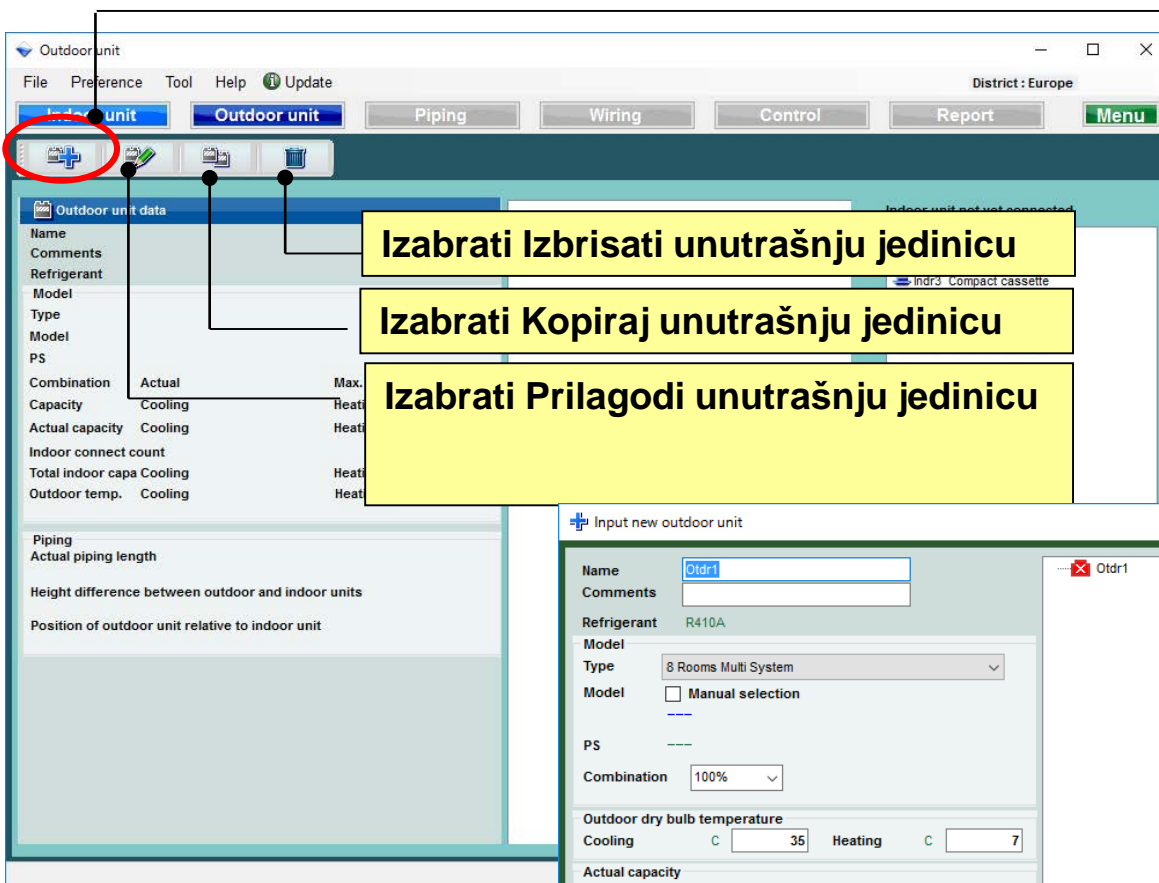

Spoljna jedinica (2/4)

+

Input new outdoor unit

Name

Otdr1

Comments

Refrigerant

R410A

Model

Type

8 Rooms Multi System

Model

☐ Manual selection

PS

Combination

100%

Outdoor dry bulb temperature

Cooling

C

35

Heating

C

7

Actual capacity

Cooling

kW

Heating

kW

Piping

Actual piping length

m

7.5

Position of outdoor unit relative to indoor unit

☐ Higher ↑
 ☒ Same Floor →
 ☐ Lower ↓

Height difference between outdoor and indoor units

m

0.0

Prikaz imena preference

Ulazni komentari. (ograničenje je 10 karaktera)
Moguće je slobodno pisati. (Primer. : Krov, 1F)

Izaberite vrstu spoljne jedinice

Izabrati model spoljne jedinice

Izabrati maksimalni limit. Ukoliko se maksimalni limit prekorači, spoljna jedinica će se automatski promeniti na model iznad.

Uneti uslove za dizajn spoljne jedinice .
Ukoliko se ne odlučite za početne dizajn uslove, podrazumevani ulazni parametri ce biti „35C,, na hladjenju i “7C,, na grejanju

Uneti vrednost „Stvarne dužine cevi“ i "Visinska razlika".
Odabrati poziciju spoljne jedinice povezane sa unutrašnjom jedinicom.(※1)

Cancel

OK

(※1) The loss coefficient is automatically calculated.

Spoljna jedinica (3/4)

Input new outdoor unit

Name: Otdr1

Comments:

Refrigerant: R410A

Model:

Type: 8 Rooms Multi System

Model: ☐ Manual selection

PS: ---

Combination: 100%

Outdoor dry bulb temperature

Cooling: C 35 Heating: C 7

Actual capacity

Cooling: kW Heating: kW

Piping

Actual piping length: m 7.5

Position of outdoor unit relative to indoor unit

☐ Higher ☒ Same Floor ☐ Lower

Height difference between outdoor and indoor units: m 0.0

Indoor unit not yet connected

Indr1 Compact cassette

Indr2 Compact cassette

Indr3 Compact cassette

Indr4 Compact cassette

Indr5 Compact cassette

Indr6 Compact cassette

Crvena oznaka označava uslove za dizajn.

Koristite ekran za unos unutrašnjih jedinica da biste podesili njihovo grupisanje (prevuci i pusti)

Input new outdoor unit

Name: Otdr1

Comments:

Refrigerant: R410A

Model:

Type: 8 Rooms Multi System

Model: ☐ Manual selection

AOYG45LBTS

PS: 1 ϕ , 230V, 50Hz

Combination: 100%

Outdoor dry bulb temperature

Cooling: C 35 Heating: C

Actual capacity

Cooling: 12.30 kW Heating: 14.22

Piping

Actual piping length: m 7.5

Position of outdoor unit relative to indoor unit

☐ Higher ☒ Same Floor ☐ Lower

Height difference between outdoor and indoor units: m 0.0

Indoor unit not yet connected

Otdr1 AOYG45LBTS 67.9%

Indr1 AUYG07LVLA

Indr2 AUYG07LVLA

Indr3 AUYG07LVLA

Indr4 AUYG07LVLA

Indr5 AUYG07LVLA

Indr6 AUYG07LVLA

Cancel OK

Model spoljne jedinice i unutrašnja jedinica su odabrani automatski.

Spoljna jedinica (4/4)

Izaberite "OK"

Prkaz ekrana sa osnovnim podacima o unutrašnjoj i spolnoj jedinici

Outdoor unit

File Preference Tool Help Update

Indoor unit Outdoor unit Piping Wiring Control Report Menu

District : Europe

Outdoor unit data

Name: Otdr1

Comments:

Refrigerant: R410A

Model: 8 Rooms Multi System

Model: AOYG45LBT8

PS: 1φ, 230V, 50Hz

Combination: Actual 87.9% Max. 100%

Capacity: Cooling 14.00 kW Heating 16.00 kW

Actual capacity: Cooling 12.30 kW Heating 14.22 kW

Indoor connect count: 6

Total indoor capa: Cooling 12.30 kW Heating 14.22 kW

Outdoor temp.: Cooling 35.0C Heating 7.0C

Piping: Actual piping length: 7.5m


Height difference between outdoor and indoor units: 0.0m

Position of outdoor unit relative to indoor unit: Same Floor

Indoor unit not yet connected

3D model of the outdoor unit

Unutrašnja jedinica

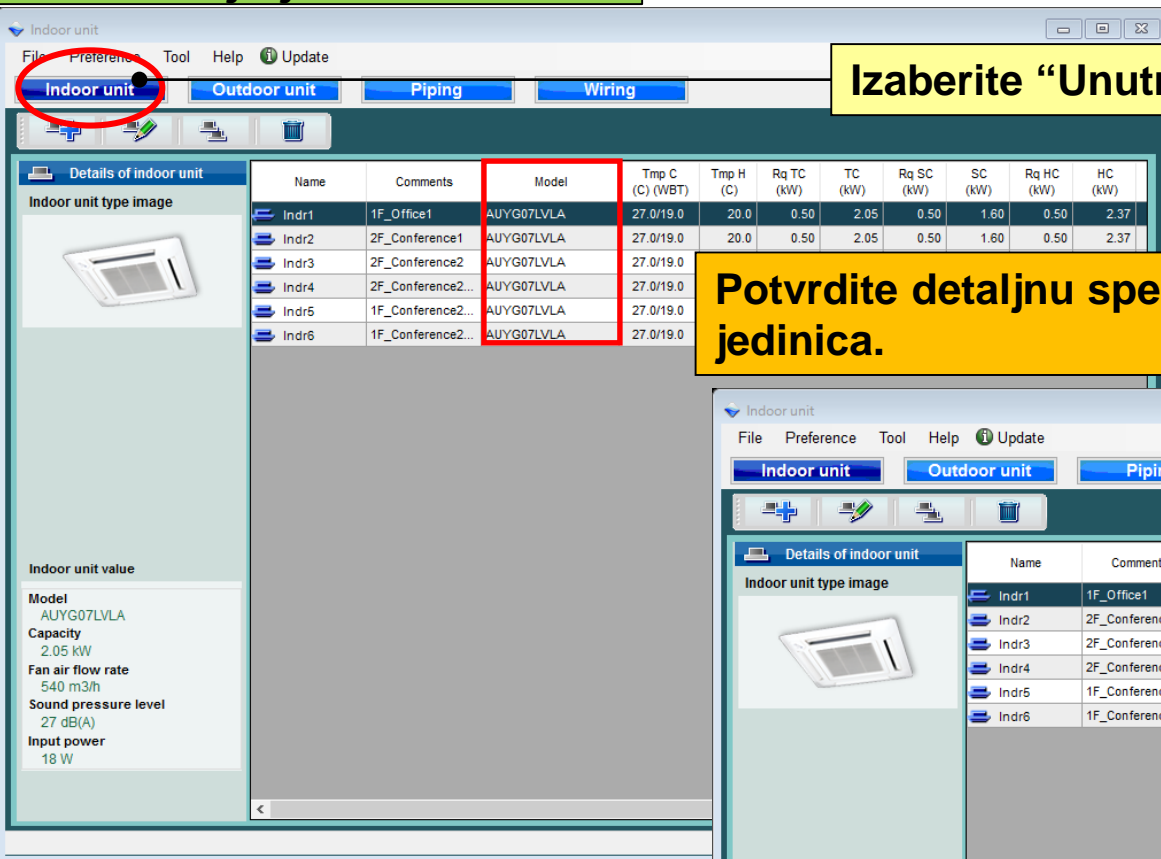

Indoor unit | Outdoor unit | Piping | Wiring

Details of indoor unit

Indoor unit type image

Name	Comments	Model	Tmp C (C) (WBT)	Tmp H (C)	Rq TC (kW)	TC (kW)	Rq SC (kW)	SC (kW)	Rq HC (kW)	HC (kW)
Indr1	1F_Office1	AUYG07LVLA	27.0/19.0	20.0	0.50	2.05	0.50	1.60	0.50	2.37
Indr2	2F_Conference1	AUYG07LVLA	27.0/19.0	20.0	0.50	2.05	0.50	1.60	0.50	2.37
Indr3	2F_Conference2	AUYG07LVLA	27.0/19.0							
Indr4	2F_Conference2...	AUYG07LVLA	27.0/19.0							
Indr5	1F_Conference2...	AUYG07LVLA	27.0/19.0							
Indr6	1F_Conference2...	AUYG07LVLA	27.0/19.0							


Indoor unit value

Model
AUYG07LVLA
Capacity
2.05 kW
Fan air flow rate
540 m3/h
Sound pressure level
27 dB(A)
Input power
18 W

Izaberite “Unutrašnja jedinica”



Potvrdite detaljnu specifikaciju na ekranu unutrašnjih jedinica.

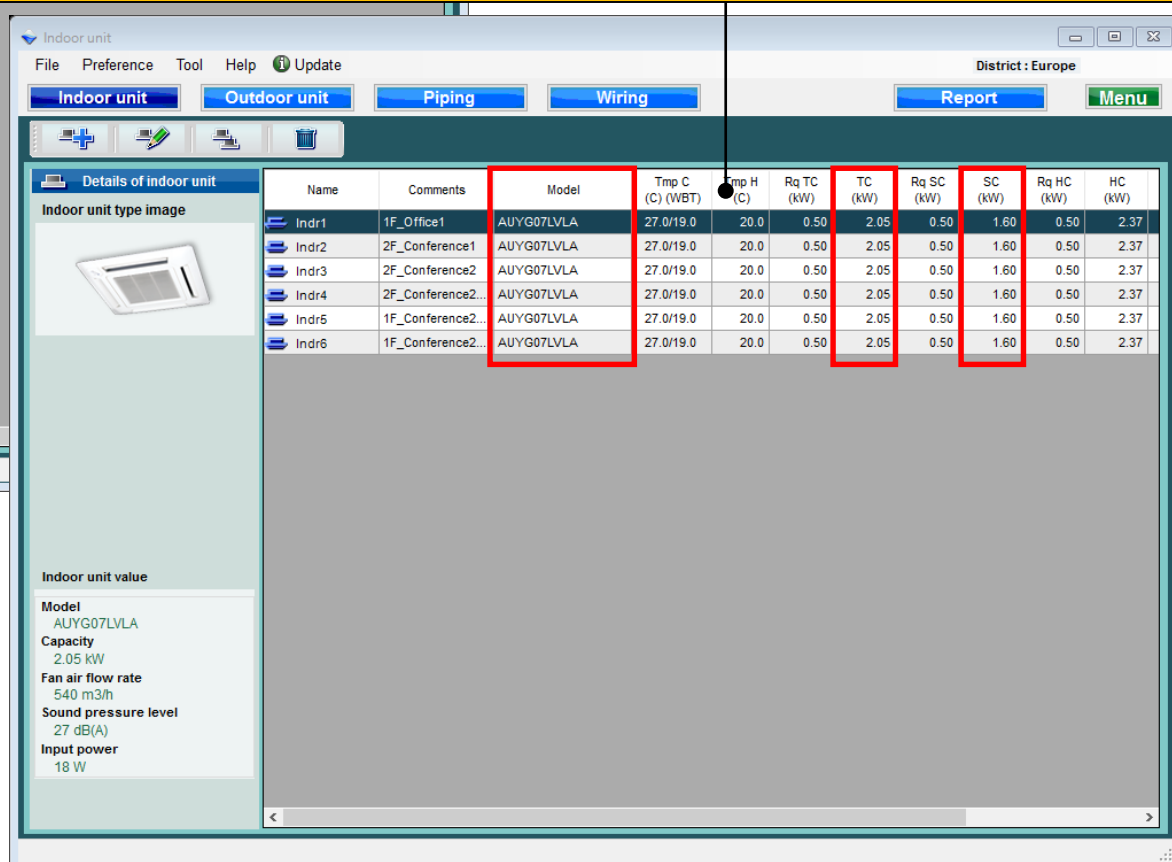

Indoor unit | Outdoor unit | Piping | Wiring

District : Europe

Report | Menu

Details of indoor unit

Indoor unit type image

Name	Comments	Model	Tmp C (C) (WBT)	Tmp H (C)	Rq TC (kW)	TC (kW)	Rq SC (kW)	SC (kW)	Rq HC (kW)	HC (kW)
Indr1	1F_Office1	AUYG07LVLA	27.0/19.0	20.0	0.50	2.05	0.50	1.60	0.50	2.37
Indr2	2F_Conference1	AUYG07LVLA	27.0/19.0	20.0	0.50	2.05	0.50	1.60	0.50	2.37
Indr3	2F_Conference2	AUYG07LVLA	27.0/19.0	20.0	0.50	2.05	0.50	1.60	0.50	2.37
Indr4	2F_Conference2...	AUYG07LVLA	27.0/19.0	20.0	0.50	2.05	0.50	1.60	0.50	2.37
Indr5	1F_Conference2...	AUYG07LVLA	27.0/19.0	20.0	0.50	2.05	0.50	1.60	0.50	2.37
Indr6	1F_Conference2...	AUYG07LVLA	27.0/19.0	20.0	0.50	2.05	0.50	1.60	0.50	2.37

Indoor unit value

Model
AUYG07LVLA
Capacity
2.05 kW
Fan air flow rate
540 m3/h
Sound pressure level
27 dB(A)
Input power
18 W