

Borulama (Multi sistem)

Outdoor unit

File Preference Tool Help Update

Outdoor unit Piping Wiring

Outdoor unit data

Name Otdr1

Comments

Refrigerant R410A

Model

Type 2 Rooms Multi System

Model AOYG14LAC2

PS 1ø, 230V, 50Hz

Capacity Cooling 4.00 kW Heating 4.40 kW

Indoor connect count 2

Outdoor temp. Cooling 35.0C Heating 7.0C

Indoor temperatur Cooling 27.0C Heating 20.0C

Piping

Total pipe length 10.0m

Actual capacity Cooling / Heating Otdr1

Piping

File Preference Tool Help Update

Outdoor unit Piping Wiring Report Menu

Otdr1 AOYG14LAC2

Unit B 0.0m 5.0m 6.35x9.52

Unit A 0.0m 5.0m 6.35x9.52

Indr1 ASYG07LMCA

Indr2 ASYG07LMCA

Otdr1 AOYG14LAC2

Total pipe length 10.0 m (Max:30.0 m)

Additional refrigerant 0.00 kg (Max:0.10 kg)

Total Refrigerant




“Borulama ayarları” seç

Boru sistemi şemasını göster


Soğutucu akışkan sistemi kararı (Multi sistem)

Soğutucu sistemi kontrol edin

Kontrol edilen soğutucu akışkan sistemi her ekranda düzenlenemez

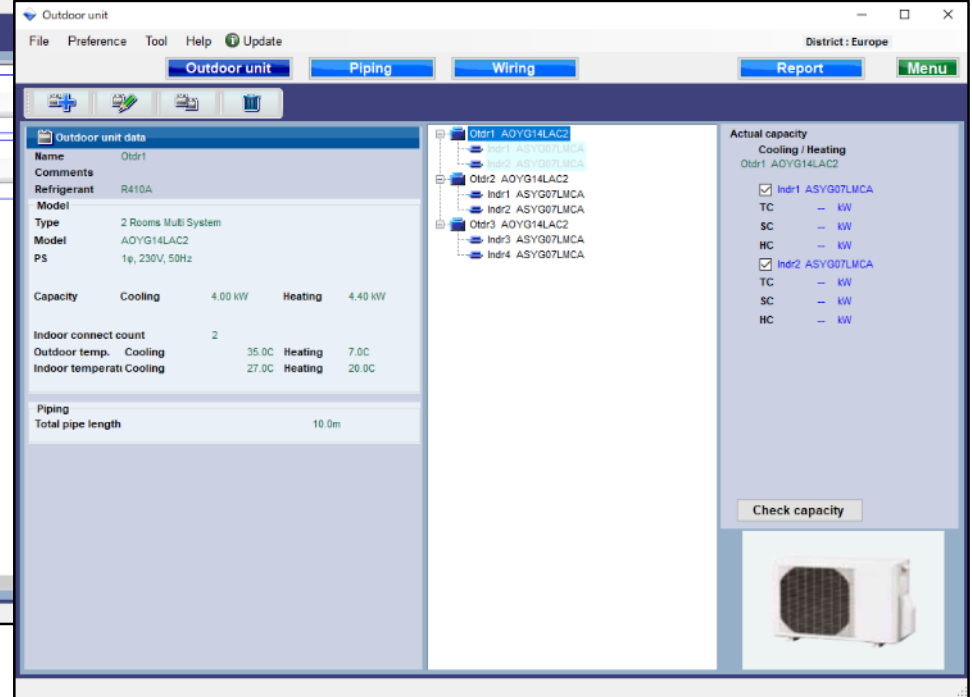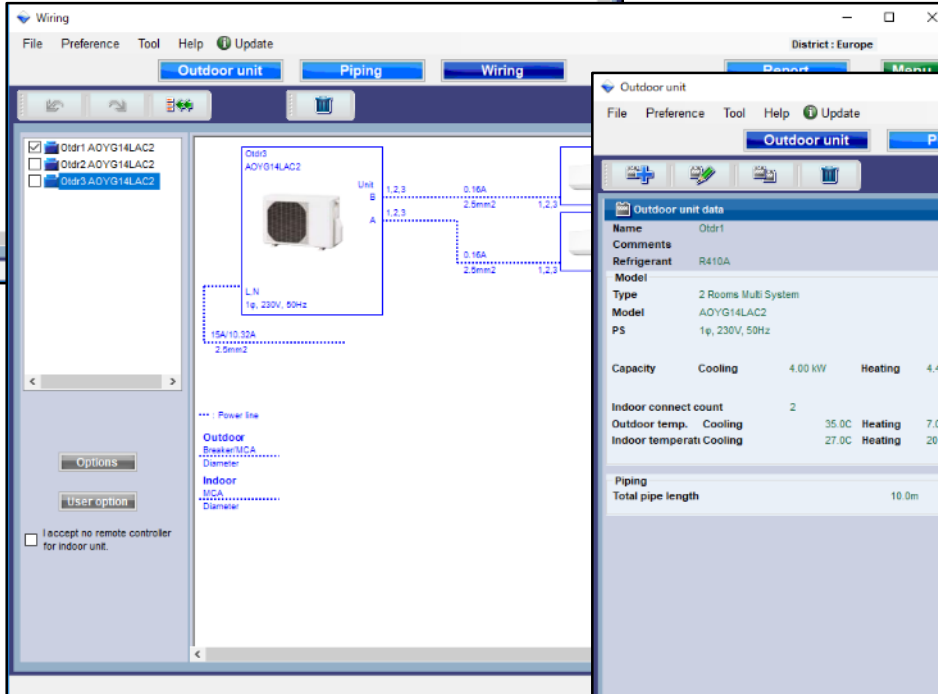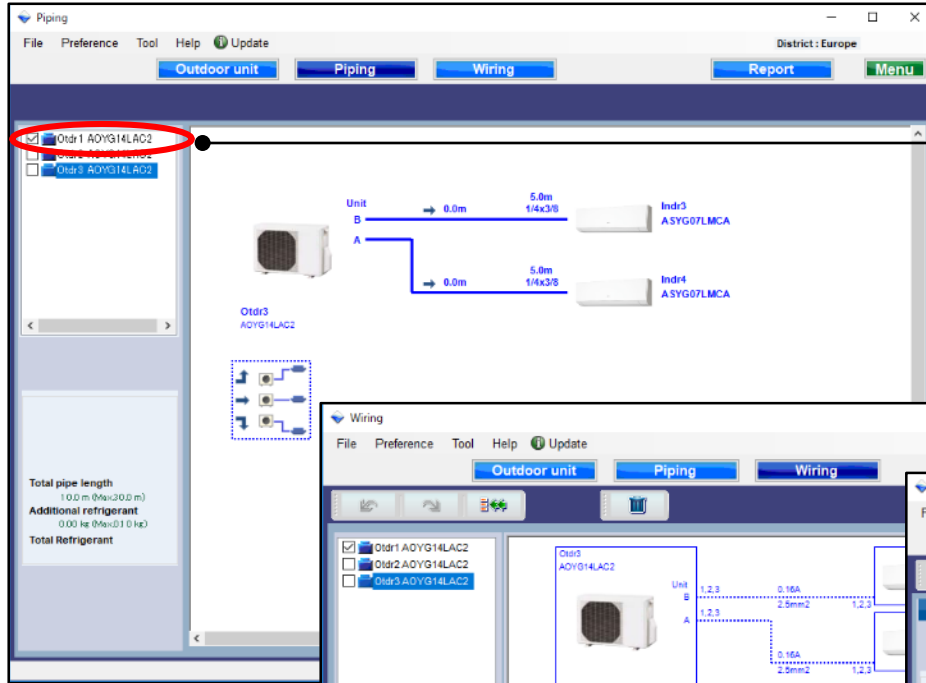

Borulama (Eş zamanlı multi sistem)

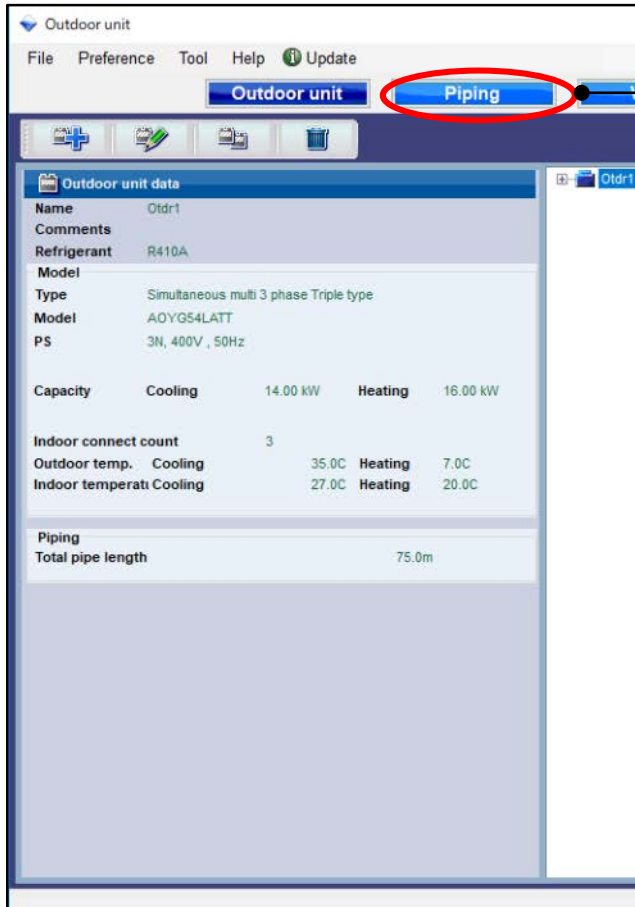

Outdoor unit data

Name: Otdr1
Comments:
Refrigerant: R410A
Model:
Type: Simultaneous multi 3 phase Triple type
Model: AOYG54LATT
PS: 3N, 400V, 50Hz

Capacity: Cooling 14.00 kW Heating 16.00 kW

Indoor connect count: 3
Outdoor temp. Cooling 35.0C Heating 7.0C
Indoor temperature Cooling 27.0C Heating 20.0C

Piping
Total pipe length: 75.0m

Outdoor unit

Piping

Wiring


Report

Menu

Actual capacity
Cooling / Heating
Otdr1 AOYG
Indr1
TC
SC 2.73 kW

“Borulama ayarları” seç

Boru sistemi şemasını göster

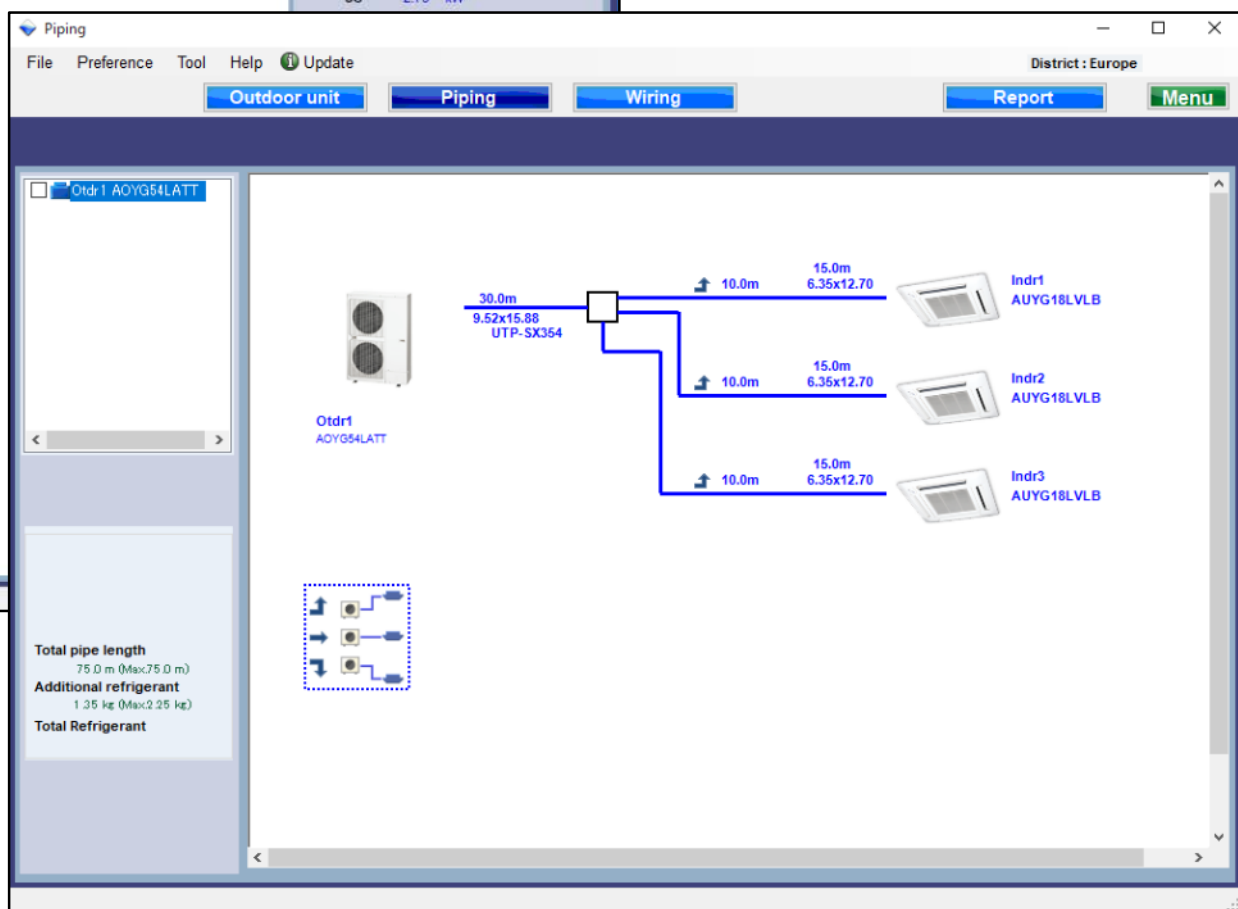

Piping

File Preference Tool Help Update

District : Europe

Outdoor unit Piping Wiring Report Menu

Otdr1 AOYG54LATT

Indr1 AUYG18LVLB
Indr2 AUYG18LVLB
Indr3 AUYG18LVLB

30.0m 9.52x15.88 UTP-SX354

10.0m 15.0m 6.35x12.70
10.0m 15.0m 6.35x12.70
10.0m 15.0m 6.35x12.70

Total pipe length: 75.0 m (Max:75.0 m)
Additional refrigerant: 1.35 kg (Max:2.25 kg)
Total Refrigerant